

Technical Data Information


Giro Gunmetal Grey Bath Shower Mixer AVG04MG

R.T. LARGE

ESTABLISHED 1969









INFORMATION

Construction Brass Body (CuZn40Pb2), EN CW617N (equivalent to BS CZ122);

Zinc-alloy Handles: Brass Base plates

Finishes Chrome Finish Product Type Contemporary

Water Pressure Min. 1.5 bar, Max. 6.0 bar

Plumbing Systems Suitable for all plumbing systems, Hot and Cold water pressure preferably balanced,

Max. supply pressure differential requirement no greater than 5:1

Standards Complies with BS5412, BS EN200

Certification WRAS approved

Cartridge 1/4 Turn 3/4" Ceramic disc valves

Aerator M22 Spout aerator Fitting Brass G¾" BSP tails

Packaging 50 x 29.5 x 38cm / carton (4 boxes), Dimension: 28 x 24 x 18cm / box;

Weight: 2.63Kg / box

Guarantee 5 years against manufacturing faults (excluding serviceable parts)


Additional Information Supplied with Chrome 1.5m smooth PVC hose, outlet hose elbow,

single mode ABS handset & wall mounted ABS holder

All Dimensions are in millimetres. The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice.

R.T. LARGE

ESTABLISHED 1969

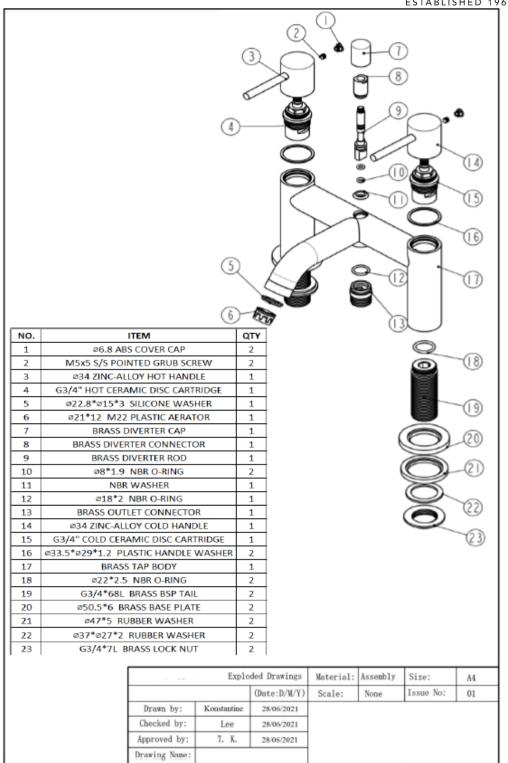

Flow Rates (Litres per minute)

System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
	-	-	-	6.4	9.5	12.0	13.9	17.2	-	-

All Dimensions are in millimetres. The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice.