
## **Technical Data Information**

Giro Chrome Freestanding Bath Shower Mixer AVG88




ESTABLISHED 1969

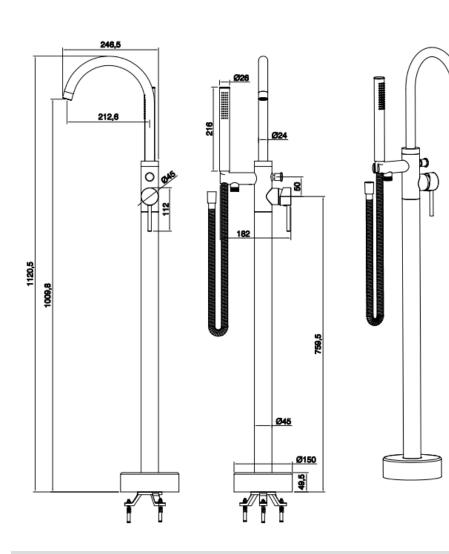

## INFORMATION

Construction	Brass Body (CuZn40Pb2), EN CW617N (equivalent to BS CZ122)							
	Zinc-alloy Handle							
Finishes	Chrome Plated BS EN 248							
Product Type	Contemporary							
Water Pressure	Min. 0.5 bar (handset) 1.5 bar (spout), Max. 6.0 bar							
Plumbing Systems	Suitable for all plumbing systems, Hot and Cold water pressure preferably balanced							
	Max. supply pressure differential requirement no greater than 5:1							
Standards	Complies with BS5412, BS EN200							
Certification	Manufactured to comply with WRAS							
Cartridge	WANHAI 35mm high flow Ceramic disc cartridge							
Fitting	Stainless steel M12 x G3/4" BSP Female Flexible inlet connection hoses, 950mm							
Aerator	Laminar stream straightener							
Packaging	94.5 x 34.5 x 40cm / carton (4 boxes), Dimension: 93 x 33 x 9.5cm / box;							
	Weight: 4.88Kg / box							
Guarantee	10 years against manufacturing faults (excluding serviceable parts)							
Additional Information	Supplied with Brushed brass brass Shower handset & 1.5m smooth PVC Shower hose							

All Dimensions are in millimetres | All Dimensions in mm have a tolerance of ± 1mm. The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice.

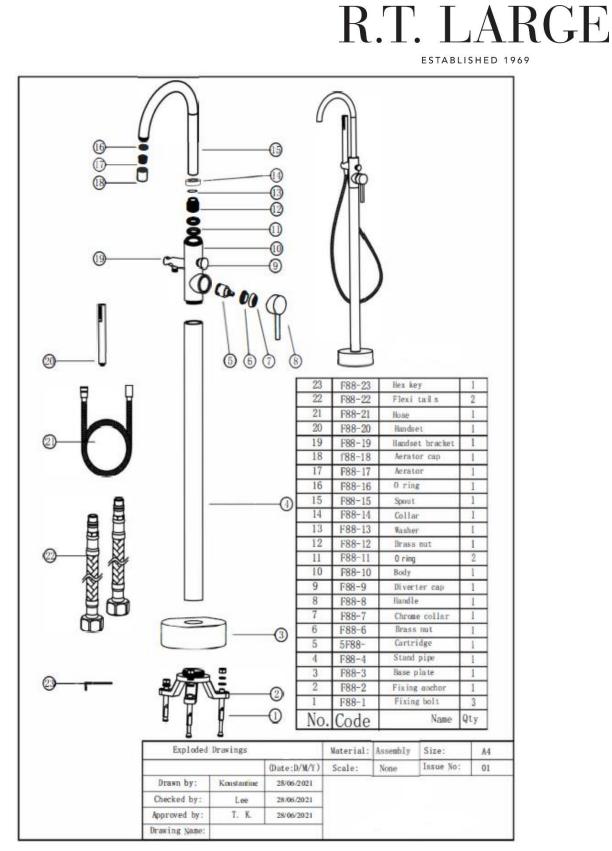

## Flow Rates (Litres per minute)

System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
	2.7	3.2	3.6	4.3	6.0	7.5	8.4	10.2	11.7	13.1

All Dimensions are in millimetres | All Dimensions in mm have a tolerance of  $\pm 1$ mm. The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice.