
## **Technical Data Information**

R.T. LARGE

Saldo Chrome Wall Mount Basin Mixer AVHD18

## ESTABLISHED 1969

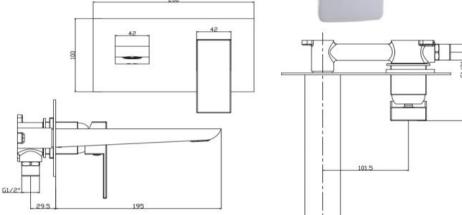

## INFORMATION

| Construction     | Brass Body (CuZn40Pb2), EN CW617N (equivalent to BS CZ122);<br>Zinc-alloy Handle; Stainless steel Face plate  |  |  |  |  |  |  |  |
|------------------|---|--|--|--|--|--|--|--|
| Finishes         | Chrome plated to BS EN 248  |  |  |  |  |  |  |  |
| Product Type     | Contemporary  |  |  |  |  |  |  |  |
| Water Pressure   | Min. 0.2 bar, Max. 6.0 bar  |  |  |  |  |  |  |  |
| Plumbing Systems | Suitable for all plumbing systems, Hot and Cold water pressure preferably balanced<br>Max. supply pressure differential requirement no greater than 5:1 |  |  |  |  |  |  |  |
| Standards        | Complies with BS5412, BS EN200  |  |  |  |  |  |  |  |
| Certification    |   |  |  |  |  |  |  |  |
| Cartridge        | 35mm WANHAI Ceramic disc cartridge  |  |  |  |  |  |  |  |
| Aerator          | M24*1 Spout aerator   |  |  |  |  |  |  |  |
| Fitting          | Two G1/2" x G1/2" BSP Flexible inlet connection hoses supplied (hot and cold)   |  |  |  |  |  |  |  |
| Packaging        | 46.5 x 39.5 x 26cm / carton (8 boxes); Dimension: 22 x 19 x 12cm / box;<br>Weight: 2.19Kg / box   |  |  |  |  |  |  |  |
| Guarantee        | 10 years against manufacturing faults (excluding serviceable parts)   |  |  |  |  |  |  |  |

## Flow Rates (Litres per minute)

| System Pressure | 0.1 Bar | 0.2 Bar | 0.3 Bar | 0.5 Bar | 1.0 Bar | 1.5 Bar | 2.0 Bar | 3.0 Bar | 4.0 Bar | 5.0 Bar |
|-----------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| AVHD18          | -       | 4.0     | -       | 5.8     | 7.7     | 9.5     | 11.0    | 13.6    | -       | -       |

All Dimensions are in millimetres. The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice.