


## Technical Data Information

Saldo Chrome Wall Mounted Bath Filler  
AVHD17

# R.T. LARGE

ESTABLISHED 1969

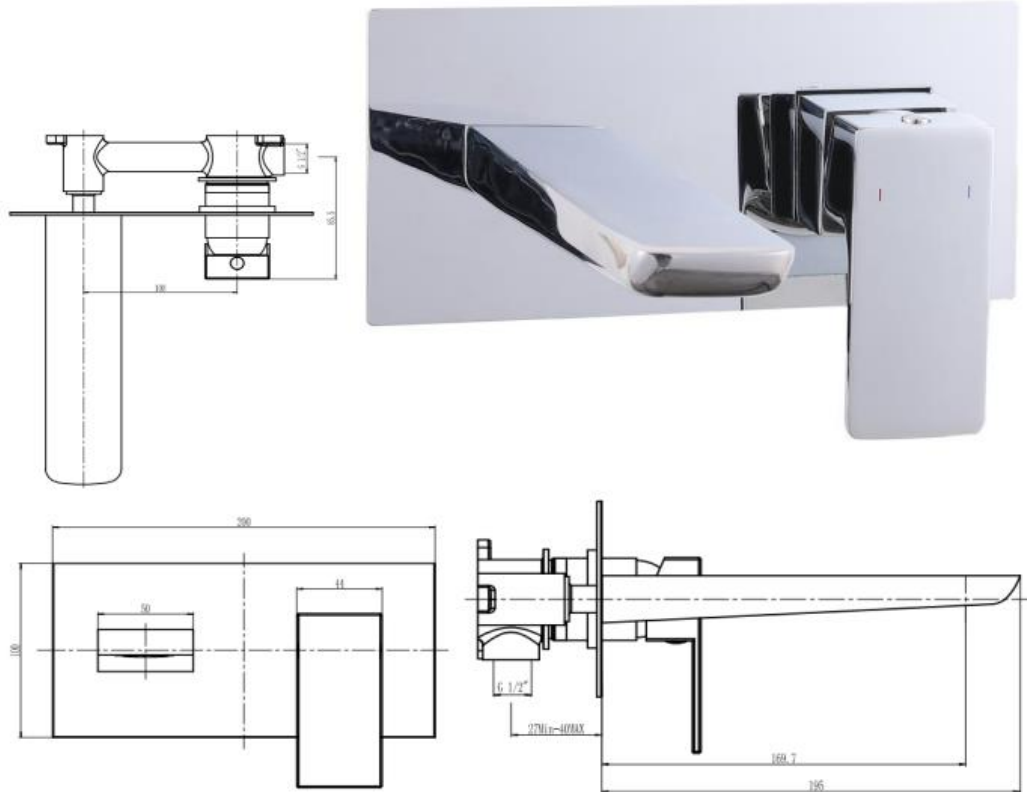

## INFORMATION

<b>Construction</b>	Brass Body (CuZn40Pb2), EN CW617N (equivalent to BS CZ122); Zinc-alloy Handles
<b>Finishes</b>	Chrome plated to BS EN 248
<b>Product Type</b>	Contemporary
<b>Water Pressure</b>	Min. 1.0 bar, Max. 6.0 bar
<b>Plumbing Systems</b>	Suitable for all plumbing systems, Hot and Cold water pressure preferably balanced Max. supply pressure differential requirement no greater than 5:1
<b>Standards</b>	Complies with BS5412, BS EN200
<b>Certification</b>	-
<b>Cartridge</b>	35mm WANHAI Ceramic disc cartridge
<b>Aerator</b>	Spout aerator
<b>Fitting</b>	Two G1/2" x G1/2" BSP Flexible inlet connection hoses supplied (hot and cold)
<b>Packaging</b>	46.5 x 39.5 x 26cm / carton (8 boxes); Dimension: 22 x 19 x 12cm / box; Weight: 2.31Kg / box
<b>Guarantee</b>	10 years against manufacturing faults (excluding serviceable parts)

### Flow Rates (Litres per minute)

System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
AVHD17	5.3	7.2	-	11.3	15.7	18.4	21.3	26.0	-	-

All Dimensions are in millimetres. The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice.